solo® pro



wireless or low-voltage

512.832.6939 | sales@screeninnovations.com

motor

- Lithium Rechargeable RTS (RF)
- 24 V Dry Contact
- 24 V 485 2-way
- 24 V RTS (RF)

size


Max: 106” (2692mm) in 16:9

Available in 1” increments. All sizes are measured diagonally. Some materials may be limited in size. All dimensions are listed as seamless.

installation | adjustment

- Drop is adjustable in the field up to 12” (305mm)
- Cassette to be installed by mounting to any SOLO accessories

colors

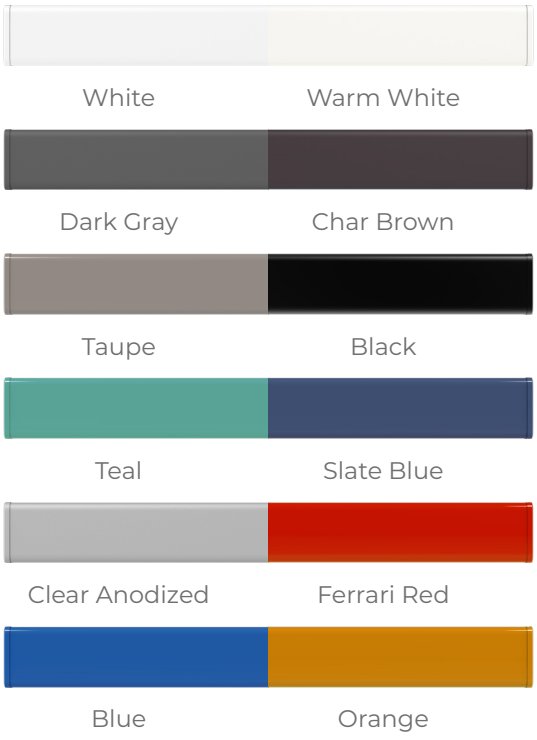

aspect ratios

16:9 | 16:10

accessories

- Standard Accessories: (2) Sets of Quick Release Brackets / (1) SOLO Remote / (1) Charging Cable (with Lithium motor option)
- Optional Accessories: Quick Release Bracket / Universal Locking Bracket / Solo Connect / Solo Remote / Charging Cable / MyLink/ Solo Flown Kit / Ceiling Bracket

materials

